

6-DZF-13.3



Applications

- › Electric vehicle
- › Electric wheelchair
- › Electric scooter
- › Electric play car for children
- › Garbage truck
- › Patrol car

General Features

- › High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- › High Energy Density and Power Density
- › Excellent Charge Acceptance Ability
- › Strong High and Low Temperature Performance
- › Optimized Capability of instant High-current Discharging
- › Low self-discharge rate

Specification

Nominal Voltage	12V
Nominal Capacity	13.3Ah
Design life	5 years
Terminal	M5
Approx. Weight	Approx4.25kg (9.36lbs)
Container Material	ABS

14.5Ah 10Hour Rate (1.45A to 10.5V)

Rated Capacity **13.3Ah** 2Hour Rate (6.65A to 10.5V)


12.0Ah 1Hour Rate (12.0A to 10.5V)

Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F)
	Charge: -20 ~50°C(-4~ 122°F)
	Storage: -20 ~50°C(-4~ 122°F)

Charge Method (25 °C)	Float Use:13.7-13.9V@25°C
	Cycle Use :14.7-14.9V,@25°C
	Max charge current 2.0A
Self discharge	3% of capacity declined per month at 25°C



Dimension: 151(L)×99(W) ×98(H)×98.5(TH) Unit: mm

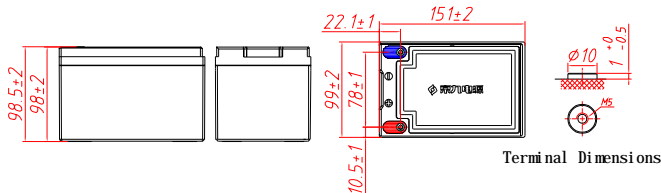

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	65.0	34.9	19.9	12.3	6.85	4.77	2.89	1.77	1.49	0.842
1.65V	63.0	33.8	19.5	12.3	6.81	4.73	2.87	1.75	1.48	0.839
1.70V	60.5	33.2	19.2	12.2	6.75	4.66	2.83	1.74	1.46	0.833
1.75V	55.6	32.0	19.0	12.0	6.65	4.60	2.80	1.72	1.45	0.830
1.80V	49.8	29.9	18.2	11.7	6.53	4.58	2.73	1.72	1.44	0.827
1.85V	44.5	26.7	16.6	10.8	6.20	4.32	2.60	1.64	1.39	0.811

Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)


FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	109.1	61.5	36.0	23.4	12.9	9.09	5.48	3.45	2.87	1.67
1.65V	104.8	60.5	35.6	23.2	12.9	8.97	5.45	3.41	2.84	1.66
1.70V	104.4	59.7	35.6	23.0	12.8	8.92	5.41	3.40	2.81	1.65
1.75V	97.2	59.5	35.4	22.8	12.8	8.86	5.38	3.38	2.79	1.64
1.80V	89.4	56.2	34.5	22.6	12.7	8.84	5.31	3.35	2.76	1.64
1.85V	79.8	50.3	31.6	21.0	12.2	8.40	5.07	3.24	2.71	1.62

6-DZF-13.3


Discharge characteristic

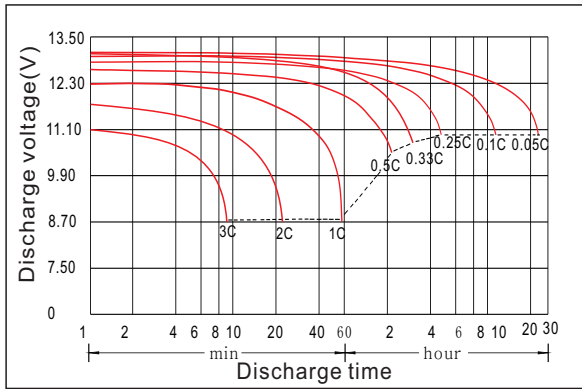


Charging characteristic

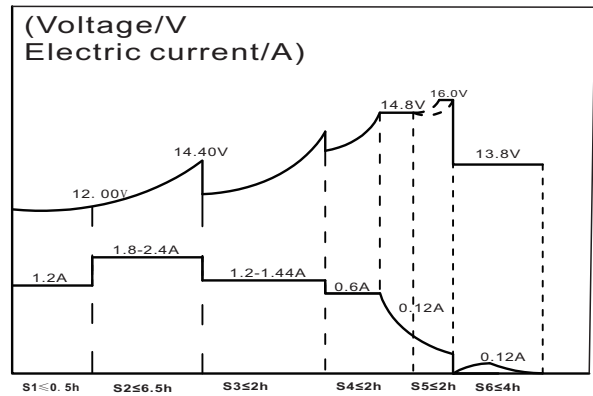


The effect of temperature on capacity

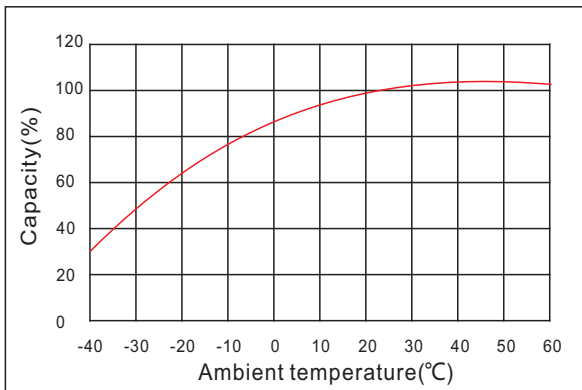


The effect of discharge depth on cycle life

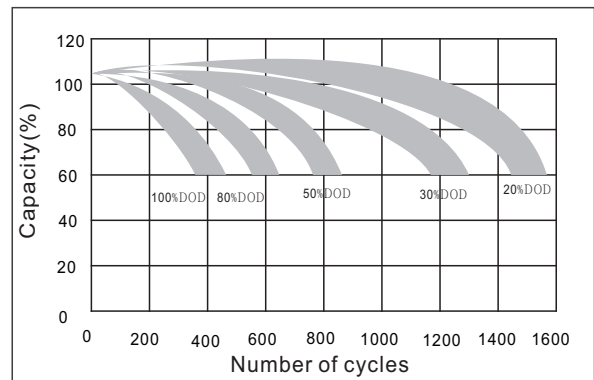

Curves of self-discharge

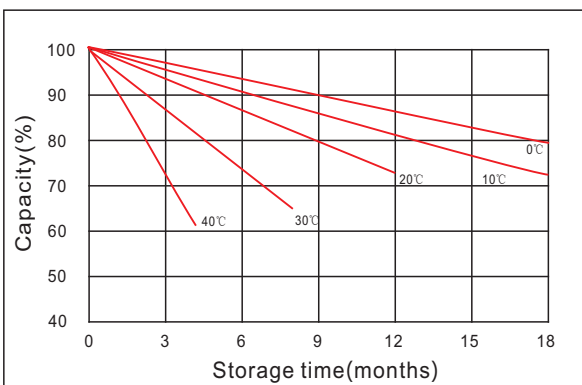

Curves of open circuit voltage vs. capacity

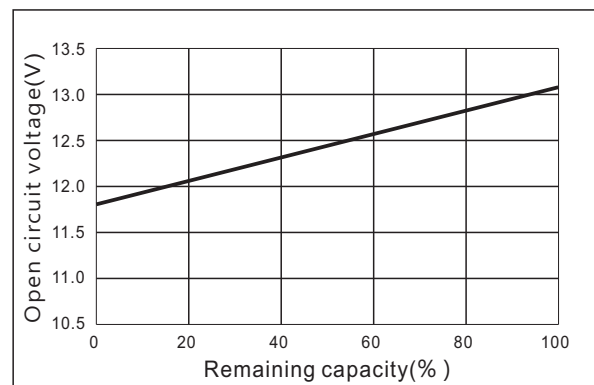

www.kiju.com.cn info@kiju.com.cn

Jiangxi Jingjiu Power Science&Technology Co. Ltd.
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

+86-791-85982779 +86-791-85989842

Jiangxi Jingjiu Power (Jiujiang) Co. Ltd.
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, Jiujiang City, Jiangxi Province, China.

