

## 6-DZF-22



### Applications


- > Electric vehicle
- > Electric wheelchair
- > Electric scooter
- > Electric play car for children
- > Garbage truck
- > Patrol car

### General Features

- > High Corrosion Resistant Performance: Pb-Ca multi-alloy grid
- > High Energy Density and Power Density
- > Excellent Charge Acceptance Ability
- > Strong High and Low Temperature Performance
- > Optimized Capability of instant High-current Discharging
- > Low self-discharge rate



Dimension: 181(L)×77(W)×170(H)×170(TH) Unit: mm

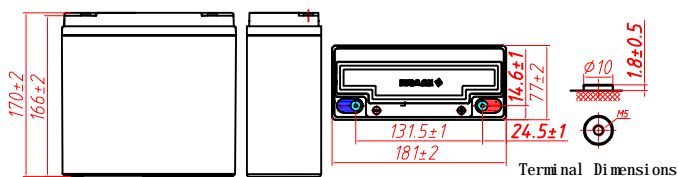

### Specification

Nominal Voltage	12V
Nominal Capacity	22Ah
Design life	5 years
Terminal	M5
Approx. Weight	Approx6.5kg (14.3lbs)
Container Material	ABS
	<b>24.5Ah</b> 10Hour Rate (2.45A to 10.5V)
	<b>22.0Ah</b> 2Hour Rate (11.0A to 10.5V)
	<b>17.0Ah</b> 1Hour Rate (17.0A to 10.5V)
Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F) Charge: -20 ~50°C(-4~ 122°F) Storage: -20 ~50°C(-4~ 122°F)
	Float Use:13.7-13.9V@25°C Cycle Use :14.7-14.9V,@25°C
Charge Method (25 °C)	Max charge current 3.30A
Self discharge	3% of capacity declined per month at 25°C

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	102	54.5	31.5	17.5	11.3	7.88	4.84	2.99	2.52	1.39
1.65V	98.4	52.9	30.8	17.4	11.3	7.82	4.81	2.96	2.50	1.38
1.70V	94.6	51.9	30.2	17.3	11.2	7.69	4.76	2.94	2.47	1.38
1.75V	86.9	50.0	30.0	17.0	11.0	7.60	4.70	2.91	2.45	1.37
1.80V	77.9	46.8	28.7	16.6	10.8	7.57	4.59	2.91	2.43	1.36
1.85V	69.6	41.7	26.2	15.4	10.3	7.13	4.36	2.78	2.35	1.34

### Constant Power Discharge Characteristics Unit: W/cell(25°C, 77°F)


FV/Time	5min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	171	96.2	56.9	33.2	21.4	15.0	9.20	5.82	4.85	2.75
1.65V	164	94.6	56.2	32.9	21.3	14.8	9.14	5.77	4.80	2.74
1.70V	163	93.3	56.2	32.6	21.3	14.7	9.08	5.74	4.74	2.73
1.75V	152	92.9	55.9	32.3	21.1	14.6	9.03	5.71	4.72	2.71
1.80V	140	87.8	54.4	32.0	21.1	14.6	8.91	5.66	4.66	2.70
1.85V	125	78.5	49.9	29.7	20.1	13.9	8.51	5.47	4.58	2.67

# 6-DZF-22


## Discharge characteristic

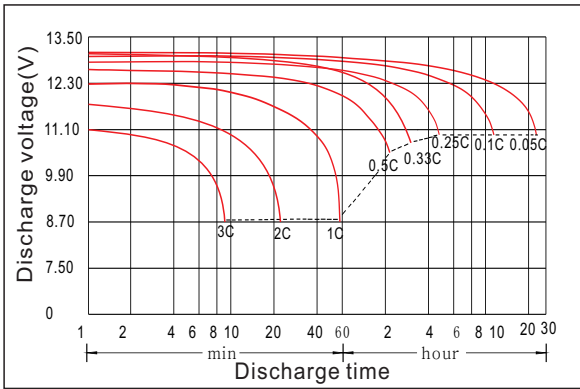


## Charging characteristic

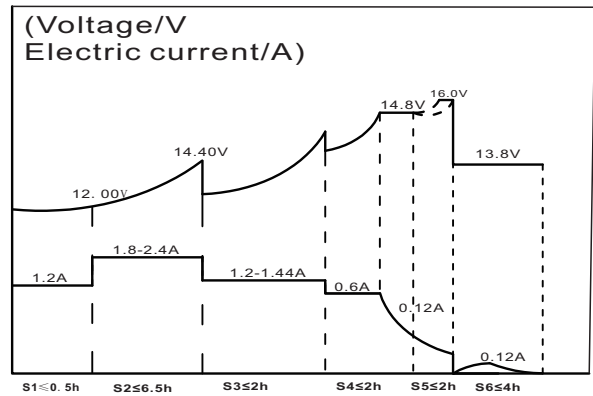


## The effect of temperature on capacity

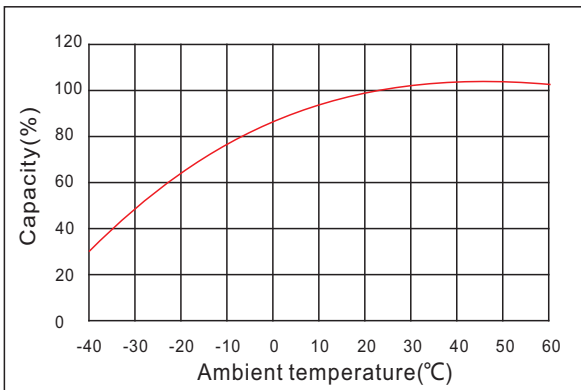

## The effect of discharge depth on cycle life

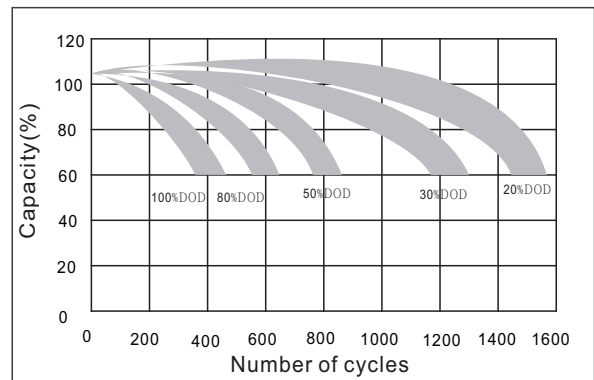

## Curves of self-discharge

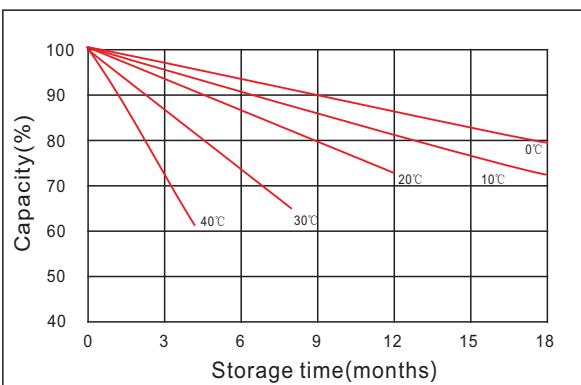

## Curves of open circuit voltage vs. capacity

