

## 6-EVF-59




### General Features

- High corrosion resistant performance: Pb-Ca multi-alloy grid
- High energy density and power density
- Excellent charge acceptance ability
- Strong high and low temperature performance
- Optimized capability of instant high-current discharging
- Low self-discharge rate



Dimension: 228(L)×148(W)×178(H)×178(TH) Unit: mm

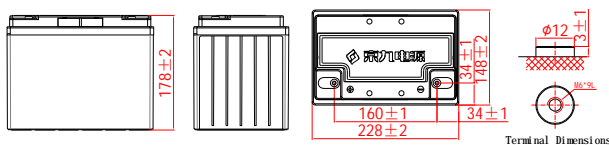

### Applications

- Electric vehicle
- Electric wheelchair
- Electric scooter
- Electric play car for children
- Garbage truck
- Patrol car

### Specification

Nominal Voltage	12V
Nominal Capacity	59Ah
Design life	5 years
Terminal	M6
Approx. Weight	Approx 17.3kg (38.1lbs)
Container Material	ABS
Rated Capacity	<b>70.0Ah</b> 20Hour Rate (3.50A to 10.5V) <b>59.0Ah</b> 3Hour Rate (19.7A to 10.5V) <b>46.0Ah</b> 1Hour Rate (46.0A to 10.5V)
Operating Temperature	Discharge: -20 ~50°C(-4~ 122°F) Charge: -20 ~50°C(-4~ 122°F) Storage: -20 ~50°C(-4~ 122°F)
Charge Method (25 °C)	Float Use:13.7-13.9V@25 Cycle Use :14.7-14.9V,@25 Max charge current 8.85A
Self discharge	3% of capacity declined per month at 25°C

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	79.7	47.3	27.3	20.4	12.9	8.06	6.80	3.55
1.65V	78.1	47.0	27.1	20.3	12.8	7.99	6.73	3.54
1.70V	76.6	46.7	26.9	19.9	12.7	7.91	6.67	3.51
1.75V	76.0	46.0	26.5	19.7	12.5	7.84	6.60	3.50
1.80V	72.7	44.8	26.0	19.6	12.2	7.84	6.53	3.49
1.85V	66.3	41.5	24.7	18.5	11.6	7.48	6.33	3.42

### Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)


FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	144	89.8	51.5	38.9	24.5	15.7	13.1	7.03
1.65V	142	89.0	51.4	38.4	24.3	15.5	12.9	7.00
1.70V	142	88.3	51.2	38.2	24.2	15.5	12.8	6.96
1.75V	142	87.5	50.9	37.9	24.0	15.4	12.7	6.93
1.80V	138	86.7	50.7	37.9	23.7	15.2	12.6	6.90
1.85V	126	80.4	48.5	36.0	22.6	14.7	12.3	6.83

# 6-EVF-59


## Discharge characteristic

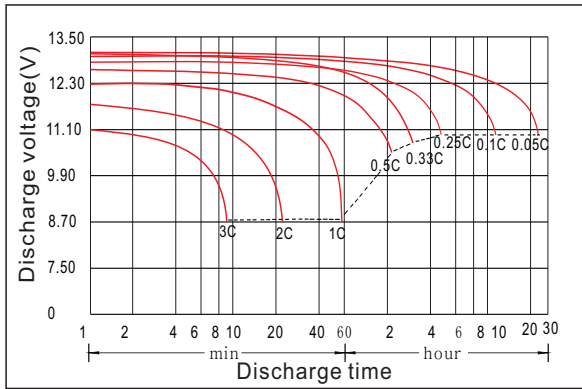


## Charging characteristic

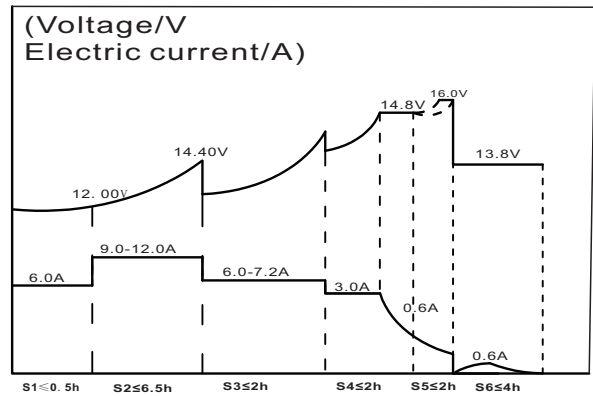


## The effect of temperature on capacity

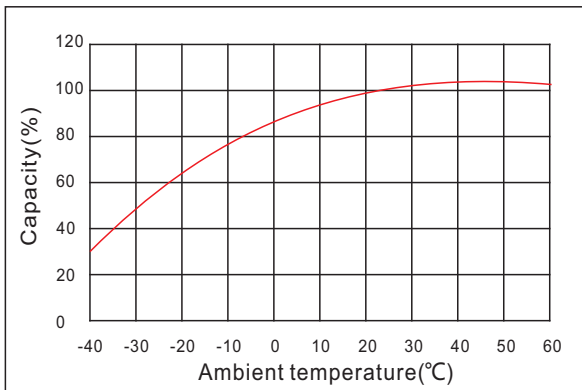


## The effect of discharge depth on cycle life

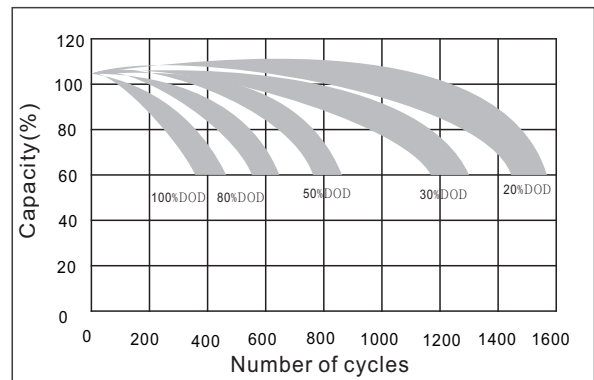

## Curves of self-discharge

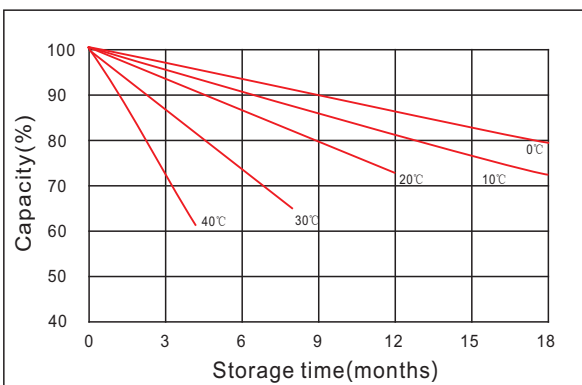

## Curves of open circuit voltage vs. capacity

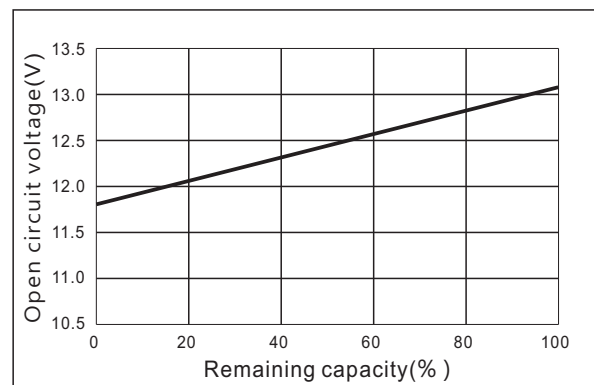

[www.kiju.com.cn](http://www.kiju.com.cn)    [info@kiju.com.cn](mailto:info@kiju.com.cn)

**Jiangxi Jingjiu Power Science & Technology Co. Ltd.**  
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

+86-791-85982779    +86-791-85989842

**Jiangxi Jingjiu Power ( Jiujiang ) Co. Ltd.**  
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, Jiujiang City, Jiangxi Province, China.

