

# JLG6-210




## JLG Series Pure GEL battery

### General Features

- › Nanosilica colloidal electrolyte and high tin positive plate alloy design to enhance battery performance
- › Relatively rich electrolyte, high temperature and low temperature performance is superior
- › Long cycle life, excellent deep cycle discharge ability
- › Excellent charge acceptance ability
- › Precision sealing technology
- › Long life



Dimension: 243(L) × 188(W) × 275(H) × 275(TH) Unit: mm

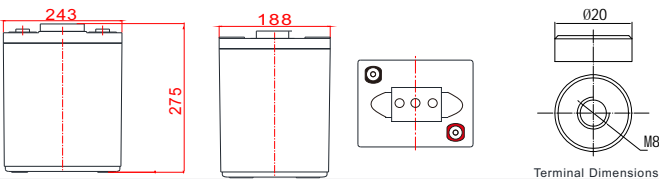

### Applications

- › Solar / wind energy and other new energy storage
- › UPS/EPS
- › Power systems
- › Telecommunications system
- › Emergency lighting, Auto control system
- › Other general purpose

### Specification

Nominal Voltage	6V	
Nominal Capacity	210Ah	
Design life	10 years	
Terminal	M8	
Approx. Weight	Approx 29.5kg (65.04lbs)	
Container Material	ABS	
Rated Capacity	210.0Ah	20Hour Rate (10.5A to 5.25V)
	157.5Ah	3Hour Rate (52.5A to 5.10V)
	116.0Ah	1Hour Rate (116A to 4.80V)
Internal resistance	Full charged at 25°C: 3.4 mΩ	
Max. Discharge Current	2520A(5S)	
Operating Temperature	Discharge: -40 ~60°C (-40 ~ 140°F)	
	Charge: -20 ~50°C (-4 ~ 122°F)	
	Storage: -20 ~50°C (-4 ~ 122°F)	
Charge current:	Max. 52.5A ; Recom. 21.0A	
Charge Method (25°C)	Float Charge: 6.75-6.90V, recom. 6.75V (-9mV/°C)	
	Equalize charge: 6.90-7.05V, recom. 7.05V (-12mV/°C)	
	Cycle charge: 7.20-7.50V, recom. 7.20V (-15mV/°C)	
Self discharge	3% of capacity declined per month at 25°C	

### Constant Current Discharge Characteristics Unit: A (25°C, 77°F)


FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	200	116	66.6	53.8	36.1	23.4	19.8	10.8
1.65V	196	115	66.2	53.4	35.9	23.2	19.6	10.7
1.70V	192	114	65.7	52.5	35.4	23.0	19.4	10.6
1.75V	191	113	64.7	51.9	35.0	22.8	19.2	10.5
1.80V	183	110	63.6	51.6	34.1	22.7	19.0	10.4
1.85V	167	102	60.3	48.7	32.4	21.7	18.4	10.3

### Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)


FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	362	220	127	103	68.5	45.6	38.0	21.1
1.65V	359	218	126	102	68.1	45.2	37.6	21.0
1.70V	358	216	125	101	67.7	45.0	37.2	20.9
1.75V	356	214	124	100	67.2	44.8	36.9	20.8
1.80V	346	213	123	99.8	66.4	44.1	36.5	20.7
1.85V	317	197	118	94.8	63.4	42.9	35.9	20.5

## JLG6-210


Discharge characteristic

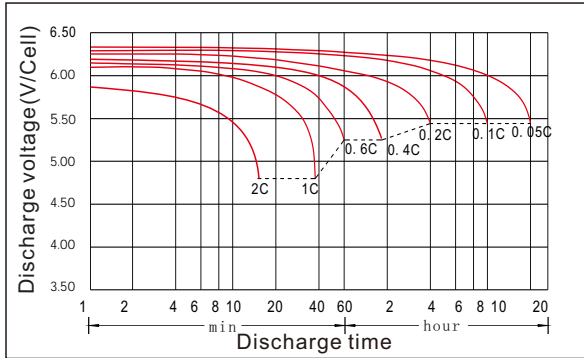


Charging characteristic

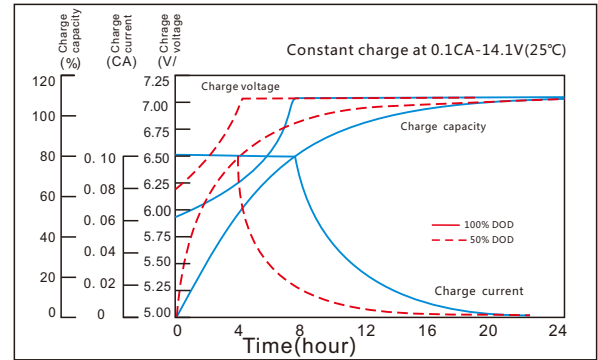


The effect of temperature on capacity

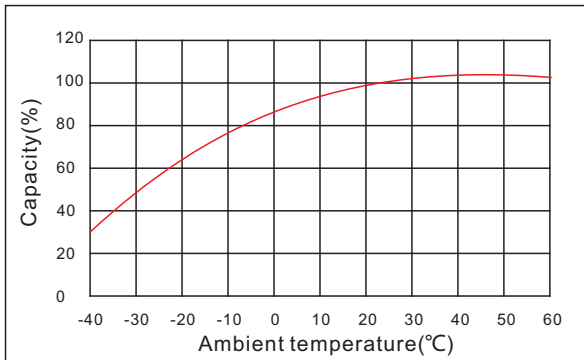


The effect of discharge depth on cycle life

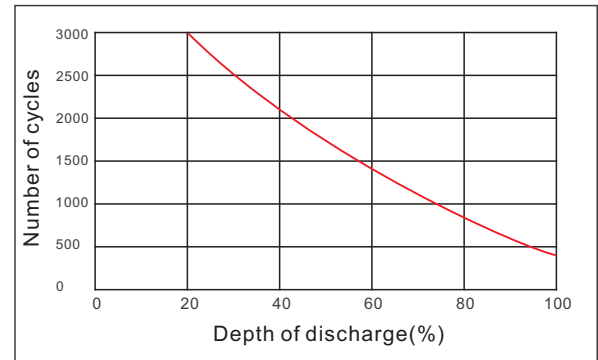

Curves of self-discharge

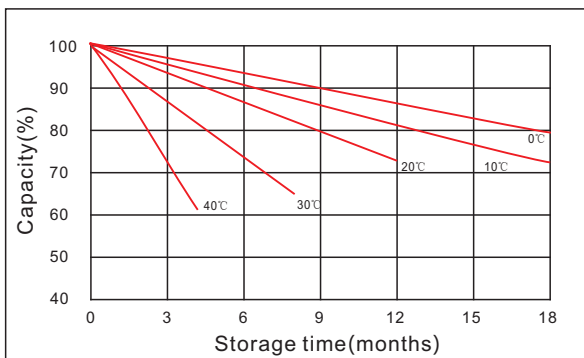

Curves of open circuit voltage vs. capacity

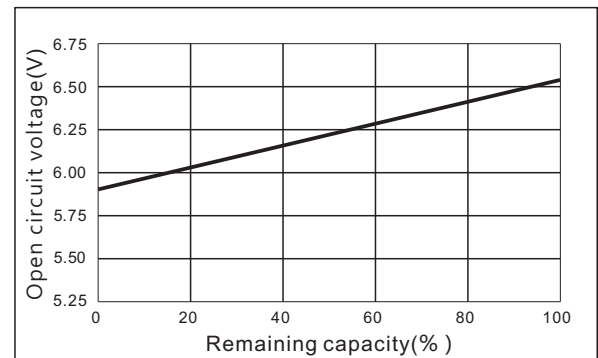

[www.kijo.com.cn](http://www.kijo.com.cn)    [info@kijo.com.cn](mailto:info@kijo.com.cn)

**Jiangxi Jingjiu Power Science&Technology Co. Ltd.**  
Add: 1388 Fushan No.1 Street, Xiaolan Economic Development Zone, Nanchang City, Jiangxi Province, China.

+86-791-85982779    +86-791-85989842

**Jiangxi Jingjiu Power ( Jiujiang) Co. Ltd.**  
Add: Xiwang Rd, Aicheng Industrial Park, Yongxiu Country, jiujiang City, Jiangxi Province, China.

