


General Features

- ▶ High corrosion resistant performance: Pb-Ca multi-alloy grid
- ▶ High energy density and power density
- ▶ Optimized capability of instant high-current discharging
- ▶ Excellent charge acceptance ability
- ▶ Excellent deep cycle discharge capability
- ▶ Strong high and low temperature performance
- ▶ Precision sealing technology
- ▶ Long life



Dimension: 151(L) × 98(W) × 94(H) × 100(TH)

Unit: mm

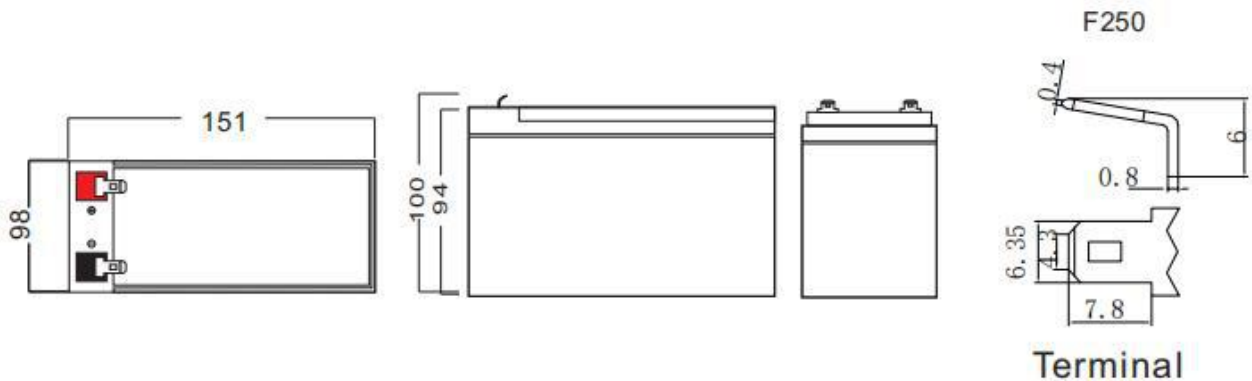

Specification	
Nominal Voltage	12V
Nominal Capacity	14Ah(48W@15min-rate to 1.67V percell@25°C)
Design life	5 years
Terminal	F250
Approx. Weight	Approx 3.95kg (8.71lbs)
Container Material	ABS(UL94-HB, UL94-V0 Optional)
short-circuit current	666A
Internal resistance(Full charged at 25°C:)	18.0 mΩ
Self discharge	3% of capacity declined per month at 25°C
Operating Temperature	
Discharge:	-20 ~50°C(-4~ 122°F)
Charge :	-20 ~50°C(-4~ 122°F)
Storage:	-20 ~50°C(-4~ 122°F)
Charge Method(25 °C)	
Charge current:	Max. 3.5A;Recom.1.5A
Float charge:13.5-13.8V	recom.13.8V(-18mV/ °C)
Equalize charge:13.8-14.1V	recom.14.1V(-24mV/ °C)
Cycle charge:14.4-15.0V	recom.14.7V(-30mV/ °C)

Standards

Executive standard YD/T 3427-2018

Applications

- ▶ UPS/EPS
- ▶ Power systems
- ▶ Telecommunications system
- ▶ Emergency lighting, Auto control system
- ▶ Solar/wind generating storage cyclic
- ▶ Other general purpose


Rated Capacity

20Hour Rate (0.700A to 10.5V)	14.0Ah
3Hour Rate (3.68A to 10.2V)	11.0Ah
1Hour Rate (8.20A to 9.6V)	8.20Ah

Attain Certificate




Discharge characteristic

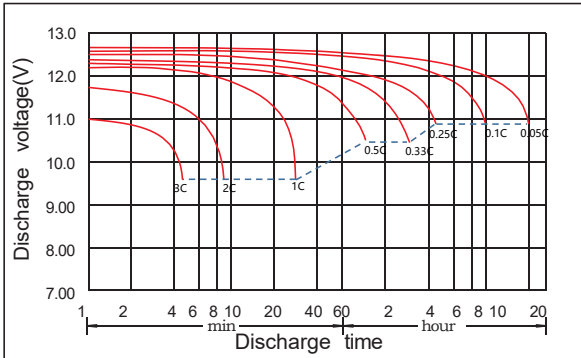


Charging characteristic



The effect of temperature on capacity

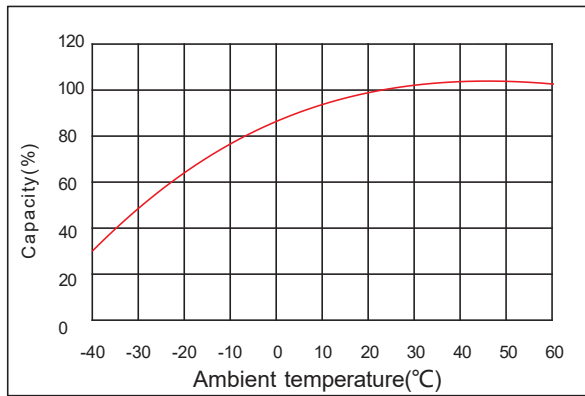

The effect of discharge depth on cycle life

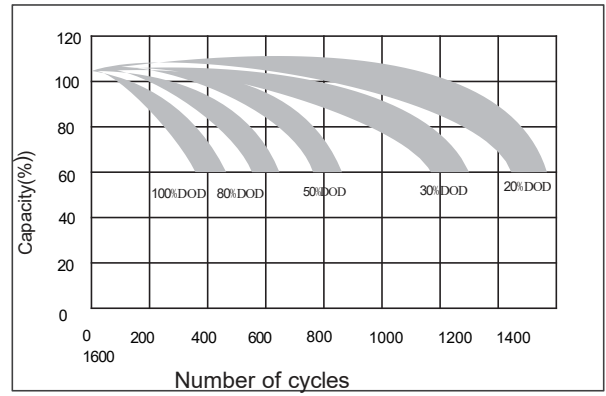

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	55.0	42.0	29.1	14.7	10.0	8.20	6.60	5.29	3.86	3.09	2.63	2.04	1.74	1.39	0.742
1.67V	50.0	37.1	28.0	14.2	9.86	8.10	6.30	5.08	3.75	3.00	2.58	2.01	1.71	1.37	0.728
1.70V	46.7	34.9	27.2	13.9	9.65	7.90	6.20	4.98	3.68	2.84	2.55	1.97	1.68	1.34	0.714
1.75V	41.8	31.6	26.2	13.4	9.50	7.80	6.10	4.86	3.63	2.80	2.44	1.94	1.64	1.32	0.700
1.80V	37.1	28.5	25.4	12.9	9.29	7.60	6.00	4.73	3.43	2.74	2.34	1.89	1.60	1.29	0.672
1.85V	32.7	25.6	24.0	12.4	8.98	7.30	5.80	4.57	3.32	2.65	2.26	1.83	1.55	1.25	0.650

Constant Power Discharge Characteristics Unit: W/cell (25°C ,77°F)

FV/Time	5min	10min	15min	30min	45min	1h	1.5h	2h	3h	4h	5h	6h	8h	10h	20h
1.60V	88.0	67.2	49.4	27.4	19.4	15.4	12.2	9.92	7.30	5.86	4.97	3.95	3.28	2.69	1.47
1.67V	83.5	61.9	48.0	26.6	18.9	15.0	11.9	9.54	7.09	5.67	4.88	3.86	3.23	2.63	1.43
1.70V	79.3	59.3	47.1	26.2	18.8	14.9	11.8	9.36	6.98	5.39	4.74	3.83	3.19	2.61	1.42
1.75V	73.1	55.3	45.7	25.6	18.4	14.8	11.7	9.15	6.88	5.32	4.64	3.74	3.06	2.55	1.39
1.80V	66.8	51.4	44.4	24.7	18.0	14.6	11.6	9.08	6.70	5.27	4.53	3.67	2.96	2.50	1.38
1.85V	60.5	47.4	42.9	24.0	17.4	14.3	11.3	8.78	6.48	5.09	4.38	3.54	2.86	2.42	1.33