


General Features

- ▶ High corrosion resistant performance: Pb-Ca multi-alloy grid
- ▶ High energy density and power density
- ▶ Optimized capability of instant high-current discharging
- ▶ Excellent charge acceptance ability
- ▶ Strong high and low temperature performance
- ▶ Low self-discharge rate



Dimension: 165(L) × 125(W) × 174(H) × 174(TH)

Unit: mm

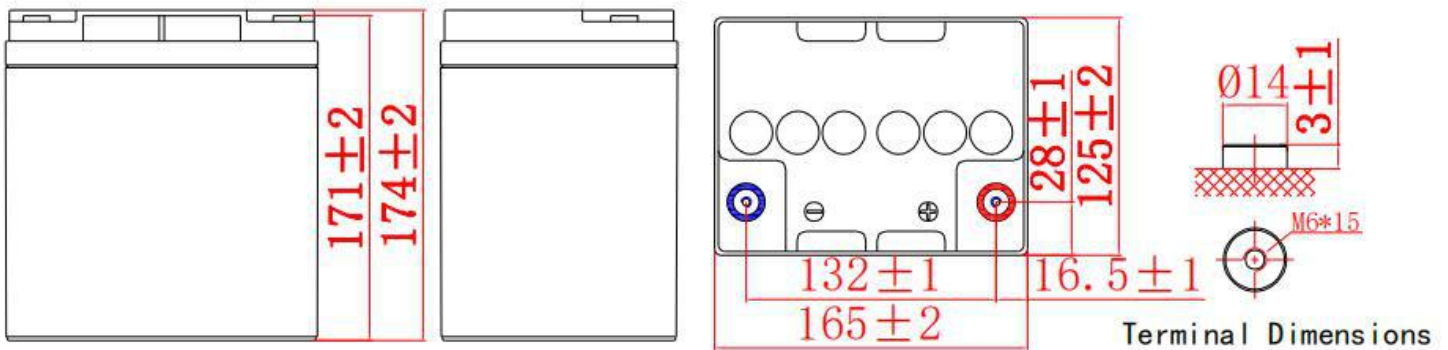

Specification	
Nominal Voltage	12V
Nominal Capacity	24Ah
Design life	5 years
Terminal	M6
Approx. Weight	Approx 9.0kg (19.8lbs)
Container Material	ABS
Self discharge	3% of capacity declined per month at 25°C
Rated Capacity	
20Hour Rate (1.50A to 10.5V)	30.0Ah
3Hour Rate (8.00A to 10.5V)	24.0Ah
1Hour Rate (19.0A to 10.5V)	19.0Ah
Operating Temperature	
Discharge:	-20 ~50°C (-4 ~ 122°F)
Charge :	-20 ~50°C (-4 ~ 122°F)
Storage:	-20 ~50°C (-4 ~ 122°F)
Charge Method(25 °C)	
Max charge current	3.6A
Float Use:	13.7-13.9V@25
Cycle Use :	14.7-14.9V,@25

Standards


Executive standard :GB/T32620-2016

Applications


- ▶ Electric vehicle
- ▶ Electric wheelchair
- ▶ Electric scooter
- ▶ Electric play car for children
- ▶ Garbage truck
- ▶ Patrol car

Attain Certificate




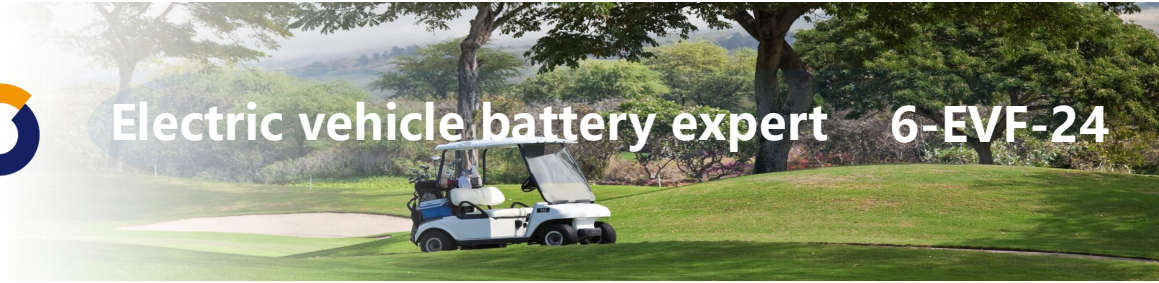


Discharge characteristic

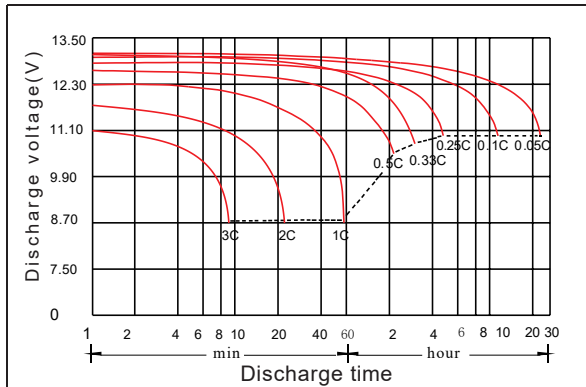


Charging characteristic

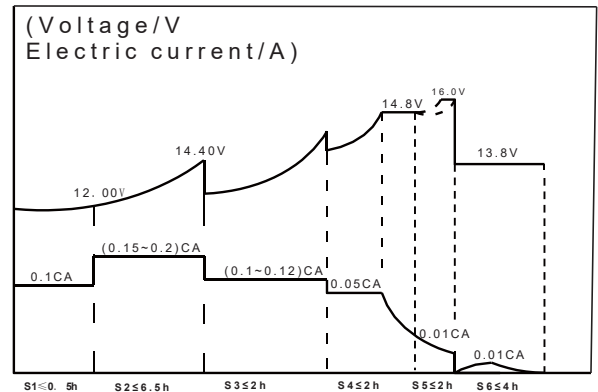

The effect of temperature on capacity

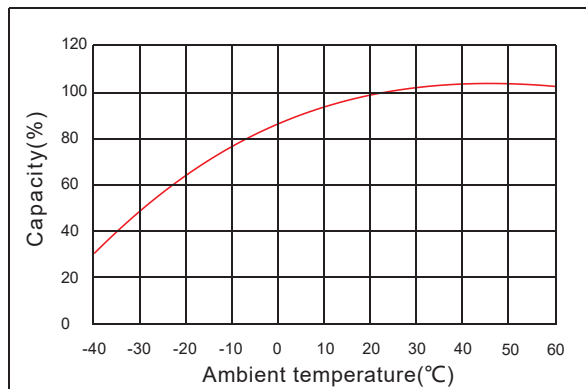

The effect of discharge depth on cycle life

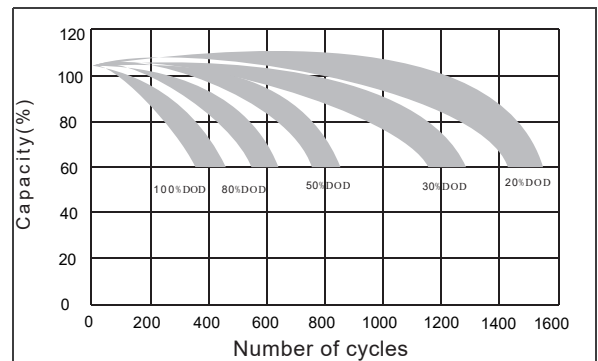

Constant Current Discharge Characteristics Unit:A (25°C,77°F)

FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	35.6	19.5	11.5	8.30	5.15	3.30	2.78	1.53
1.65V	35.0	19.4	11.5	8.23	5.12	3.27	2.75	1.52
1.70V	34.3	19.3	11.4	8.10	5.06	3.24	2.73	1.51
1.75V	34.0	19.0	11.2	8.00	5.00	3.21	2.70	1.50
1.80V	32.5	18.5	11.0	7.97	4.88	3.21	2.67	1.49
1.85V	29.5	17.2	10.4	7.51	4.63	3.06	2.59	1.47

Constant Power Discharge Characteristics Unit: W/cell (25°C,77°F)

FV/Time	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	64.4	37.1	21.8	15.8	9.79	6.42	5.35	3.01
1.65V	63.8	36.8	21.7	15.6	9.73	6.36	5.29	3.00
1.70V	63.8	36.5	21.6	15.5	9.66	6.33	5.23	2.98
1.75V	63.4	36.1	21.5	15.4	9.60	6.30	5.20	2.97
1.80V	61.7	35.8	21.4	15.4	9.48	6.24	5.14	2.96
1.85V	56.6	33.2	20.5	14.6	9.05	6.03	5.05	2.93